





AUSTRALIAN MADE

GENERATIONS IN THE MAKING

AUSTRALIAN WOODHEATERS



View Eureka woodheaters in your space.



Iconic woodheaters for a contemporary world.


Juality Guarantee

All of our heaters are built to last. That's why we guarantee all of our fireboxes to last 10 years.



Immerse yourself in the dynamic range of Eureka woodheaters. Proudly crafted over three generations in country Victoria.

FREESTANDING WOODHEATERS	2
INSERT WOODHEATERS	10
DOUBLE SIDED WOODHEATERS	16
OUR AUSTRALIAN HERITAGE	17
INSTALLATION	18

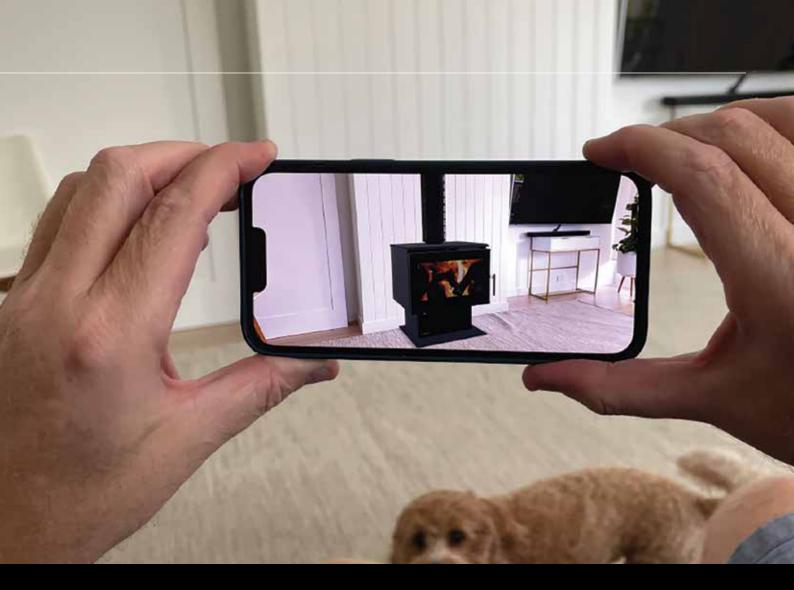


View Eureka woodheaters in your space.

Look for this icon and point your smartphone or tablet camera at the QR code.





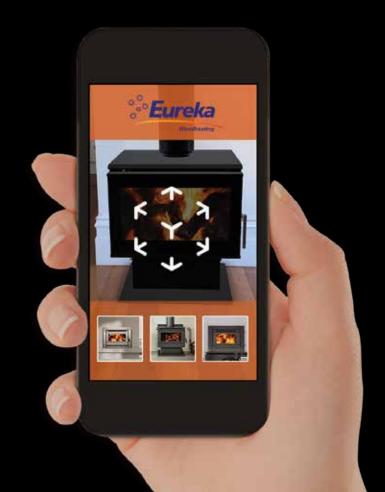




With clever design features and Eureka's pre-heated primary air technology, the freestanding Discovery Series is certain to impress. Loading firewood has never been easier, with the flat-window models encompassing a tall ergonomic pedestal. Should you simply wish to be absorbed by the flickering flames, the elegant bay window models will provide a stunning view.

Nugget

The Eureka Nugget is known all around Australia for its functionality and hardworking nature. This tough as nails radiant style unit has an exceptionally deep firebox, allowing you to fit logs that similar sized units would be envious of. The Nugget also incorporates a radiant cook top for your pots and pans, as well as a raised shelf for simmering. The Eureka Nugget truly is a tireless contributor to any Aussie home.



- \oplus Boil & simmer on top or back shelf
- \oplus Firebrick lined
- \oplus Extra deep firebox for easy loading
- \oplus 10 Year firebox warranty
- \oplus Tall pedestal for easy loading







↑ ↑ ↓ ↓

See it in your home

- 3-Speed fan
- ⊕ Firebrick lined
- \oplus 8mm steel baffle plate
- 🕀 Dual pre-heated primary air
- \oplus Cool-touch casing
- \oplus 10 Year firebox warranty

	(<u>=:</u>)	
Capacity	Log Width	Flue Size
300m ²	630mm	150mm

Onvv 300

Efficiency Emissions Output 17kW‡ 65%† 1.3g/kg

Solitaire 350

	$(\Xi \underline{} \underline{})$	
Capacity	Log Width	Flue Size
350m ²	630mm	175mm
Efficiency	Emissions	Output
66% [†]	0.9g/kg	20kW‡



- 3-Speed fan
- ⊕ Firebrick lined
- 🕀 8mm steel baffle plate
- \oplus Tall pedestal for easy loading
- 🕀 10 Year firebox warranty



Opal 180





Log	Widt
490	mm

Efficiency Emissions 69%† 0.9g/kg

Output 14kW‡

Flue Size

150mm

Miner 260

Capacity	Log Width	Flue Size
260m ²	545mm	150mm
Efficiency	Emissions	Output
72% [†]	1.4g/kg	21kW‡

Garnet 320

1.3g/kg



Efficiency

65%+

Flue Size

175mm Emissions

Freestanding Woodheaters

Freestanding Radiant Series

Sure to become a design icon — the sleek and modern Eureka Radiant series provides all the benefits of radiant style wood heating. Perfect for homes with poor insulation or high ceilings, radiant heaters emit heat directly through the outer surface of the firebox, rapidly warming your space.





See it in your home

- ⊕ Firebrick lined
- \oplus Dual baffle system featuring 8mm primary baffle
- \oplus "Boost Air" for easier ignition (Amber and Jasper)
- ⊕ Heavy duty cast iron door
- 🕀 10 Year firebox warranty

Jade 160 仚 $(\Xi - \underline{\gamma})$ Capacity Log Width Flue Size 160m² 480mm 150mm

Efficiency	Emissions	Output
70%†	1.3g/kg	9kW‡

Amber 240

Capacity	Log Width	Flue Size
240m²	535mm	150mm
Efficiency	Emissions	Output
68% [†]	0.9g/kg	12kW‡

Jasper 320 \cap

	$(\Xi = 1)$	
Capacity	Log Width	Flue Size
320m ²	570mm	150mm
Efficiency	Emissions	Output
66% [†]	1.0g/kg	14kW‡

(Coming July 2024)

Jade mk2 160		
Capacity	Log Width	Flue Size
160m²	480mm	150mm
Efficiency	Emissions	Output
64% [†]	0.7g/kg	10kW‡

- \oplus Improved clearances and hearth requirements
- ⊕ Firebrick lined
- \oplus 6mm dual skinned baffle with incorporated secondary air
- \oplus Heavy duty cast iron door
- \oplus 10 Year firebox warranty



Relax in the warmth of a Eureka.





Why compromise between performance and style! The Selection Series range is perfect for those looking to invest in a striking centre piece for their home, guaranteeing dependable heat for many winters to come.





⊕ Sleek & modern design

 \oplus 8mm steel baffle plate 🕀 10 Year firebox warranty 🕀 Dual pre-heated primary air

 \oplus Dual-action handle latch

⊕ Cast iron lined

⊕ 3-Speed fan with thermostatic switch

16kW‡

Pearl Freestanding 260 $(\overline{\underline{-}},\underline{\underline{-}})$

Capacity 260m²	Log Width 540mm	Flue Size 150mm
Efficiency	Emissions	Output
80%†	0.9g/kg	16kW‡

Ruby Freestanding 330 \bigcap

Capacity Log Width F	
	ue Size 50mm

Efficiency	Emissions	Output
76%†	1.3g/kg	17kW‡



∎ää∎

See it in your home

80%†

Efficiency	Emissions	Output
Capacity 260m ²	Log Width 540mm	Flue Size 150mm
	(<u>=;</u>)	

0.9g/kg **Ruby** Modular 330

	(= <u>:</u> - <u>1</u>)	
Capacity	Log Width	Flue Size
330m ²	595mm	150mm
Efficiency	Emissions	Output
76% ⁺	1.3g/kg	17kW‡



- ⊕ Sleek & modern design
- \oplus 750 and 1200mm bench options
- \oplus 3-Speed fan with thermostatic switch
- Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- Dual pre-heated primary air
- \oplus Dual-action handle latch



Turn a draughty open fireplace into a highly efficient heat source! Designed with functionality, efficiency and durability in mind, the Discovery series inbuilt range will keep you warm through the coldest, darkest winters.



Opal 160

Capacity	Log Width	Flue Size
160m ²	490mm	150mm
Efficiency	Emissions	Output
72% [†]	0.9g/kg	14kW‡

Stockade 240

 \wedge

1231	(<u>= :~1</u>)	
Capacity	Log Width	Flue Size
240m ²	545mm	150mm
Efficiency	Emissions	Output
67% [†]	1.5a/ka	17kW‡

 \bigcap

- \oplus 3-Speed fan
- Firebrick lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Zero clearance compatible

Garnet 280				
Capacity 280m²	Log Width	Flue Size		
28011-	620mm	175mm		

Proudly made in country Victoria.



The apex of Australian wood heating! This visually striking series offers the very best of Eureka design, functionality and endeavour. Their narrow fascia's allow the heater to sit neatly within your wall or fireplace. Take comfort as the warmth is generously distributed throughout your home.









- \oplus Sleek & modern design
- $\oplus\,$ 3-Speed fan with thermostatic switch
- \oplus Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual pre-heated primary air
- \oplus Dual-action handle latch
- \oplus Zero Clearance Option features "flush-fit fascia (3mm)"

Pearl 240			
Capacity	Log Width	Flue Size	
240m ²	540mm	150mm	
Efficiency	Emissions	Output	

Ruby 300			
Capacity	Log Width	Flue Size	
300m ²	595mm	150mm	
Efficiency	Emissions	Output	
68% ⁺	1.4g/kg	15kW‡	

The perfect work-life balance.

Eureka

EUREKA. GENERATIONS IN THE MAKING.



Oouble Sided Range

These heaters truly provide a heart for any home. Whether you're looking for a powerful heating source, a luxurious centrepiece, or the flamed vitality of a wood burning heater — this range gives incredible flexibility and warmth in multiple rooms (capable of heating up to 420m²).

For further double sided range installation options, such as dual room functionality, speak to your local dealer, or download the Double Sided Reference guide at www.eurekaheating.com.au



Jewel 420 Freestanding

- 2x 3-speed fans with thermostatic switch
- ① Cast iron lined
- ⊕ 8mm steel baffle plate
- + 10 Year firebox warranty
- Dual-action handle latch
- Dual pre-heated primary air
- ⊕ Through-wall options available

	(<u> </u>	
Capacity	Log Width	Flue Size
420m²	530mm	175mm
Efficiency	Emissions	Output
62%	1.2g/kg	25kW‡



Jewel 420 Modular

- ① 2x 3-speed fans with thermostatic switch
- \oplus Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual-action handle latch
- 🕀 Dual pre-heated primary air
- \oplus 1200mm bench option



Capacity 420m ²	Log Width 530mm	Flue Size 175mm
Efficiency	Emissions	Output
62%	1.2g/kg	25kW‡



Jewel 400 Insert

- 2x 3-speed fans with thermostatic switch
- \oplus Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual-action handle latch
- Dual pre-heated primary air
- \oplus Masonry installation only

	(<u> </u>	
Capacity	Log Width	Flue Size
400m ²	530mm	175mm
Efficiency	Emissions	Output
62%	1.2g/kg	25kW‡



After WWII and seeking new opportunities, Frank Gason, his wife Jean and their young family moved from Geelong to Ararat, Victoria and started AF Gason Pty Ltd.

Since 1946, continuous generations of the Gason family have lived and worked in this Rural City, with their presence remaining strongly felt in the community to this day. As the company has grown it has become one of the largest regional employers in the area, with the Gason name recognised not only locally but also nationally and internationally.

With core values of honesty, respect and openness, the family endeavour to ensure the wellbeing of staff, their families and the community is paramount. The importance of achieving an effective work/life balance is considered in the daily operations of the company – in fact one of the operational rules is to value family life within the community! From supporting local churches, schools, sport clubs and community groups through to finance, advice, leadership, and participation, Gason are committed to this great part of country Victoria.

Always striving to ensure the sustainability of employment through good times and bad whilst demonstrating integrity, ethical conduct, honesty and fairness in all their business dealings, the Gason family desire to provide employees with challenges, opportunities, and personal satisfaction whilst recognising their value and contribution.

From the humble beginnings of the motor trimming business, many members of the Gason clan have worked in the business. At the time of publication, 4 members of the family, spanning 3 generations, fill central roles with the manufacturer:

Chairman of the Board of Directors
Managing Director
Heater Division Manager
Industrial Services Engineer

The Gason family is proud of the business's heritage and are committed to continue designing, manufacturing and marketing high quality woodheaters tailored for the Australian market – timeless products that are designed for living and made for generations.








Zero Clearance Installation

Don't have a brick chimney, but love the sleek look of a Eureka Insert? All of the Eureka Inserts (exc. double sided range) are Zero Clearance Install compatible using the relevant Eureka Zero Clearance Cabinet. This allows for a broader range of ways to incorporate a Eureka Insert heater into your living space.





Step 2

Step 3





A Zero Clearance Cabinet allows for safe installation into timber framework with minimal clearances to the unit. Once your framework is built, it is as simple as cladding the front face with a cement sheet or equivalent, and your Eureka Insert heater is safely installed as a focal point to your room.

Minimum framing dimensions are an indicative guide only. **DO NOT** begin any construction prior to consulting the full Zero Clearance Installation guide for the relevant unit. Full Installation instructions available at www.eurekaheating.com.au


Elevated Insert Installations

Raising your Eureka Insert installation above floor level? You may be able to reduce your minimum hearth depth to 300mm. Refer to the following table as a guide on how high your unit must be raised to achieve the reduced hearth depth.


Minimum Zero Clearance Framing Dimensions

Model	н	w	D
Opal, Stockade	810	916	565
Garnet	868	1035	570
Pearl	1000	915	635
Ruby	1000	1055	610

Specifications detail minimum framework opening (inclusive of clearance from Zero Box to combustible framework)




	REF	OP	AL	STOCKADE GARNET			NET	PE	ARL	RUBY	
Hearth width	x	890mm (min.)		950mm (min.)		1035mi	m (min.)	945mr	n (min.)	1000mm (min.)	
Hearth raised	Y	Omm	155mm (min.)	Omm	132mm (min.)	Omm	197mm (min.)	Omm	175mm (min.)	Omm	140mm (min.)
Hearth depth from front of fascia	z	530mm (min.)	300mm (min.)	510mm (min.)	300mm (min.)	610mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)	530mm (min.)	300mm (min.)



w





Freestanding Specifications

ALL HEATERS ARE METALLIC BLACK AS STANDARD

Dimensions & clearances	Flue type	Overall dimensions width/height/depth			Back of Woodheater to Flue Centre		Clearanc Combusti		Minimum hearth size width/depth/thickness***			
Freestanding models	Solid / perforated	W W		D	mm	Rear	Side	Corner	w	D	т	mm in front of unit
Jade mk2	Perforated	585	770	452	183	175*	575	375	680	885	6	300
Jade mk2	Half Shield	585	770	452	183	150	600	375	680	865	6	300
Jade	Perforated	585	680	434	173	225*	725	425 / 350**	780	1155	18	500
Jade	Half Shield	585	680	434	173	225	725	450 / 350**	780	1155	18	500
Amber	Perforated	640	730	502	176	250*	750	500 / 350**	820	1265	24	550
Amber	Half Shield	640	730	502	176	300	825	475 / 300**	820	1315	24	550
Jasper	Perforated	675	770	557	196	200*	825	550 / 425**	820	1315	30	600
Jasper	Half Shield	675	770	557	196	350	900	575 / 475**	820	1465	30	600
Opal	Perforated	650	800	508	180	125*	325	150	890	960	12	400
Miner	Perforated	710	937	570	180	150*	400	175	950	1050	18	400
Garnet	Perforated	782	1008	570	180	150*	450	200	1020	1100	20	450
Onyx	Perforated	775	795	595	165	100	330	50	1170	1020	4	300
Solitaire	Perforated	850	825	620	180	100*	425	100	960	1075	6	450
Nugget	Perforated	610	710	650	175	50	550	170	770	910	9	300
Pearl	Solid/Perforated	690	765	548	205	155/50*	325	50/75	945	1000/895	9	300
Ruby	Solid/Perforated	748	828	548	205	50*	325	50	1000	895	9	300
Jewel	Solid/Perforated	695	765	745	N/A	N/A	330	N/A	940	1590	6	460


*180 degree x 900mm stainless flue shield must be installed between active and outer flue to achieve minimum rear wall clearance

** Requires additional side wing heat shields to achieve minimum corner clearance (purchased separately)

***Minimum hearth size includes rear clearance to combustible wall

Top view






ALL HEATERS ARE METALLIC BLACK AS STANDARD

Modular Specifications


Dimensions & clearances	Flue type		all dime /height		Back of Woodheater to Flue Centre		earance t nbustible		Minimum hearth size width/depth/thickness				
Modular models	Solid / perforated	w	н	D	mm	Rear	Side	Corner	w	D	т	mm in front of unit	
Pearl	Sol. / Perf.	690	635	548	205	155/50*	325	50/75*	945	1005/900	140	330	
Ruby	Sol. / Perf.	748	676	548	205	50*	325	50*	1000	895	140	330	
Jewel	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1890	32	570	
Pearl w/ Bench	Sol. / Perf.	690	635	548	205	155/50*	325	50/75*	945	1005/900	9	330	
Ruby w/ Bench	Sol. / Perf.	748	676	548	205	50*	325	50*	1000	895	9	330	
Jewel w/ Bench	Sol. / Perf.	695	653	745	N/A	N/A	475	N/A	940	1375	6	330	
1200mm Bench	-	1200	280	550	-	-	-	-	-	-	_	-	
750mm Bench	-	750	400	550	-	-	-	-	-	-	-	-	
Jewel Bench	_	1200	280	775	-	-	-	-	-	-	-	-	

*180 degree x 900mm stainless flue shield must be installed between active and outer flue to achieve minimum rear wall clearance

Installation







Insert Specifications

ALL HEATERS ARE METALLIC BLACK AS STANDARD

Dimensions & clearances	Overall dimensions width/height/depth			Rear casing dimensions				ance to comb m base of ap		Back of fascia to flue centre				
										Mas	Masonry installation ZCC inst			nue centre
Insert Models	w	н	Fascia Depth	w	н	D	Side	To Mantle Shelf	To Breast Plate	w	D	т	mm in front of ZCB***	mm
Opal	882	750	42	570	595	365	50	1100	1040	890	530*	12	570*	232
Stockade	922	758	42	631	635	430	50	1390	1340	950	510*	12	550*	296
Garnet	994	828	42	700	706	430	50	1545	1545	1035	610*	18	650*	295
Pearl Masonry	855	640	16	751	595	484	55	1500**	1410	945	550*	18	550*	326
Pearl ZC	850	674	3	Refer to ZC Install Guide			55	1500**	1410	945	N/A	18	550*	N/A
Ruby Masonry	935	705	16	808	651	484	35	1500**	1410	1000	520*	18	520*	326
Ruby ZC	930	736	3	Refer to ZC Install Guide			35	1500**	1410	1000	N/A	18	520*	N/A
Jewel	875	692	16	751	644	708	205	1127	1127	940	1890*	32	570*	354

* Minimum hearth depth in front of unit can be reduced by raising the appliance above combustible materials

(Consult your local dealer and/or page 22 of this brochure)

** Mantle deflector required to achieve mantle clearance (included with woodheater)

*** Hearth must also be installed beneath ZCC - refer to install guide for exact specifications

Notes: ‡ All KW Outputs quoted are Peak Power. † All Efficiencies quoted are Peak Efficiency %. All dimensions are in mm. Dimensions and clearances shown are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

All information in this brochure was correct at the time of printing, April 2024, however Eureka Woodheating reserves the right to change specifications without notice. Colours shown are as close as printing method allow. Installation should be carried out by a qualified installer.

All fireplace inserts must be installed into a masonry chimney or Eureka Zero Clearance Cabinet, and be fully flued.



Woodheating











Your local Eureka dealer

AF Gason Pty Ltd Phone: 03 9763 2700 heating@gason.com.au

www.eurekaheating.com.au